MINI IN-VEHICLE ANTENNA

SKU: 310004 **MAP:** \$49.99

FEATURES

- Multi-band Support: Covers 5G, 4G, 3G, and 2G across 617-5925 MHz.
- High Gain: Delivers strong performance with peak gain across wide frequencies.
- Ground Plane Independent: Works efficiently without a ground plane.
- Durable: IP67/IP69 rated for dust and water resistance.
- Compact: Low-profile design (89 \times 76 \times 30 mm) with Velcro mount.
- High-performance Cable:10 ft. DACAR-302 cable with SMA male connector.
- Wide Temperature Range: Operates from -40°C to +85°C.
- Omni-directional: Provides 360° signal reception.



KIT INCLUDES



Mini In-Vehicle Antenna with Velcro® Strips for mounting

ELECTRICAL

FREQUENCY BAND (MHZ)	617-960	1427-2690	3300-5000	5150-5925
RETURN LOSS (DB)	~-7.0	~-11.2	~-7.1	~-6.4
VSWR	~3.1:1	~2.1:1	~3.1:1	~3.0:1
EFFICIENCY (%)	~50.2	~56.3	~30.4	~25.1
PEAK GAIN (dBi)	~2.1	~6.3	~3.7	~2.8
AVERAGE PEAK GAIN (dBi)	~-3.3	~-2.5	~-5.8	~-6.1
IMPEDANCE (Ohm)	50			
POLARIZATION	Linear			
RADIATION PATTERN	Omni-Directional			
MAX POWER (W)	35			
CABLE TYPE	SMA-Male			
CABLE LENGTH (ft./m)	10 / 3			


MECHANICAL

MODEL	310004†		
DIMENSIONS (in/ mm)	3.5×3×1 / 89×76×30		
RADOME TYPE	ASA UV Stable		
RADOME COLOR	Black, White		
OPERATING TEMPERATURE (F°/°C)	-40 to +185 / -40 to +85		
SUBSTANCE COMPLIANCE	RoHS		


[↑]▲ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

we:boost

RETURN LOSS

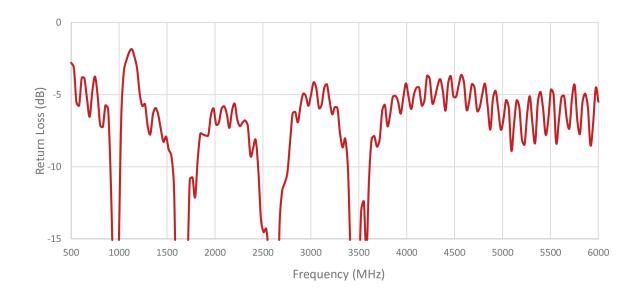


VSWR

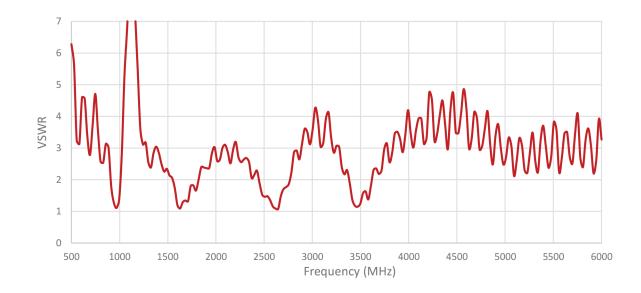


we:boost

EFFICIENCY

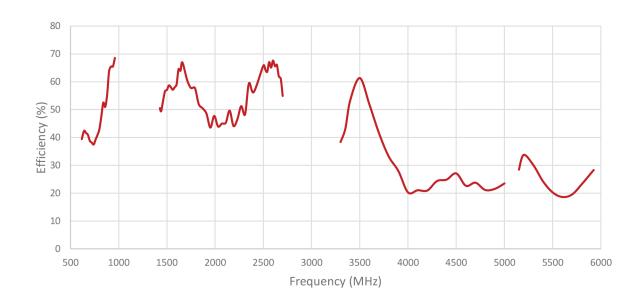


PEAK GAIN

Frequency (MHz)

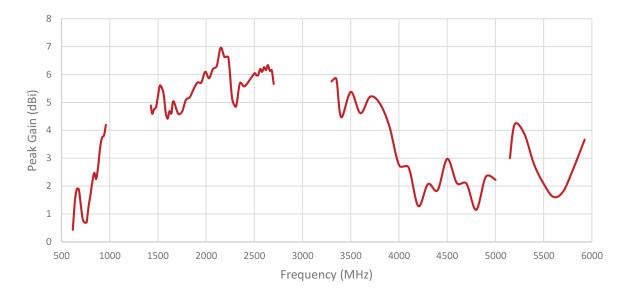


we:boost

AVERAGE GAIN

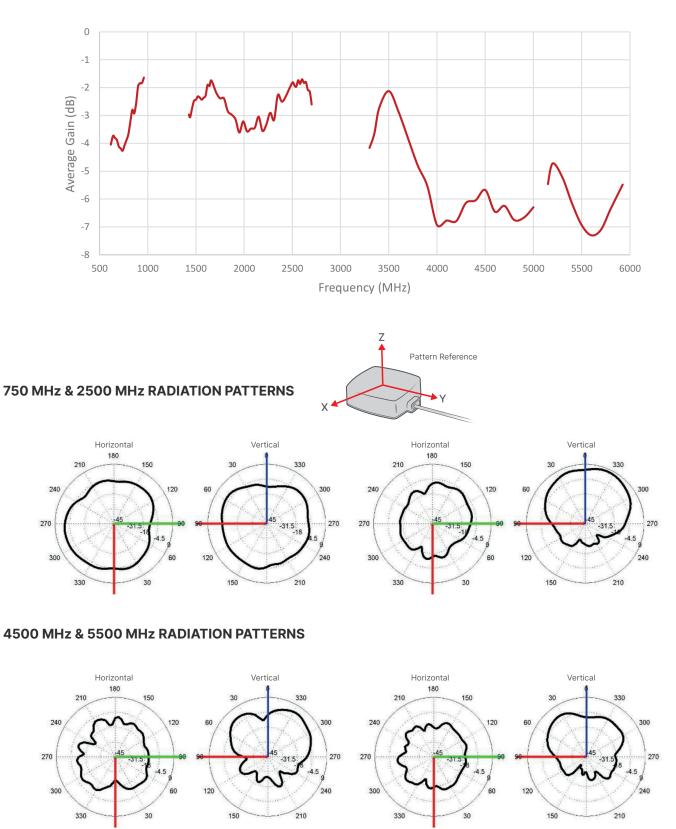

PACKAGE DIMENSIONS

5.75 L x 4.5 W x 2.25 H

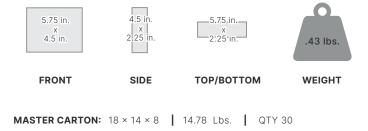

FOR PARTNER'S USE

SUPPORT



2-Year Warranty from Purchase.

Website: http://support.weboost.com

Phone: +1 866 294 1660 Monday to Saturday



UPC

