

Drive RV Antenna

SKU: 311230

MAP: \$119.99

FEATURES

- Covers 700, 800, 1700, 1900, 2200 MHz cellular
- All modes, voice and data
- High gain signal output
- Antenna can be configured into multiple lengths from 7.5 20.5 in.
- Off-road rated to MIL-STD 810H for shock and vibration
- Works with standard CB antenna mounts, includes 3-way mirror rail mount
- Connects to mobile cellular boosters
- IP66 rated for outdoor use
- Assembled in USA
- 2 year warranty
- ★WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Specifications

ELECTRICAL

Frequency Band (MHz)	698-806	806-960	1710-1880	1850-1990	1910-2170	2300-2700
Peak Gain (dBi)	2.4	2.6	3.8	3.8	3.7	4.3
Gain (dBi), typical @ 2° Elevation	1.4	2.4	3.1	2.7	2.4	2.6
Cable loss LMR- 195 30 in.	0.3	0.3	0.5	0.5	0.5	0.6
Efficiency (%)	>70%		>65%			
VSWR	<:	2:1	<2:1			
Polarization	Vertical					
Half-Power Azimuth Beamwidth (°)	360	360	360	360	360	360
Half-Power Elevation Beamwidth (°)	70	78	60	70	80	33
Impedance (Ω)	50					
Max Power (W)	10					






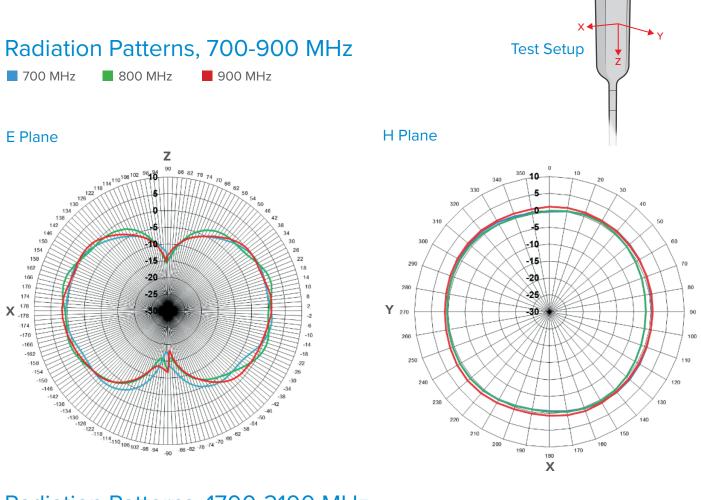


Radiation Patterns, 1700-2100 MHz

■ 1700 MHz ■ 1900 MHz ■ 2100 MHz

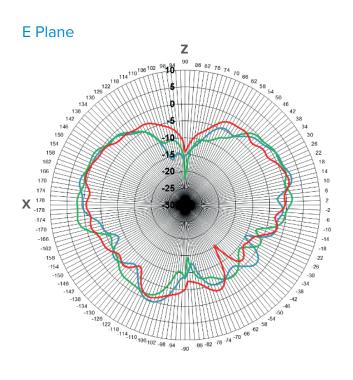


H Plane

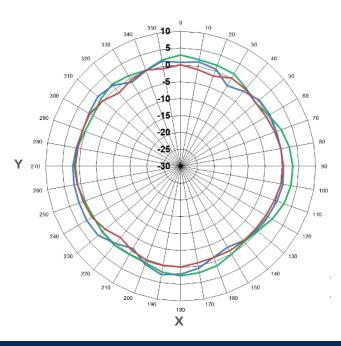




Radiation Patterns, 2300-2700 MHz

2300 MHz 2500 MHz 2700 MHz

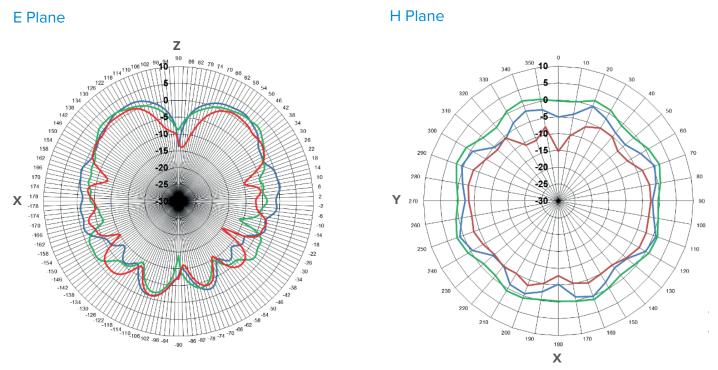


Note: Gain values at 2° elevation indicated are without cable loss. Please refer to the electrical specs chart to include cable losses.

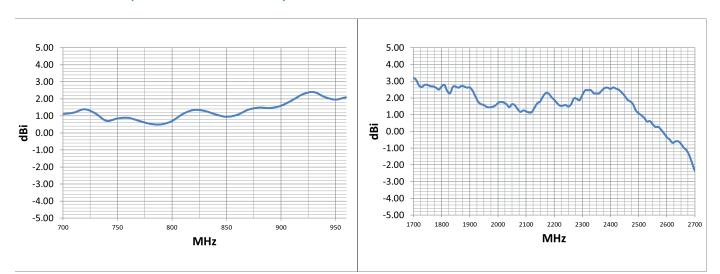

Peak Gain (@ 2° Elevation)



Efficiency (%)

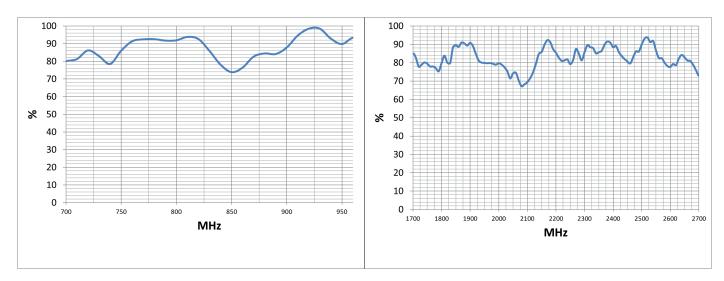

Note: Gain values at 2° elevation indicated are without cable loss. Please refer to the electrical specs chart to include cable losses.


Package Dimensions

8.14 W x 15.97 L x 3.66 D



FOR PARTNER'S USE

Support

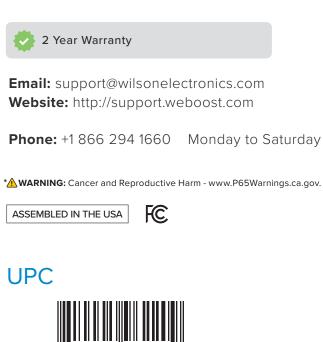

311230_DriveRVAntenna_SpecSheet_Rev04_12.09.21